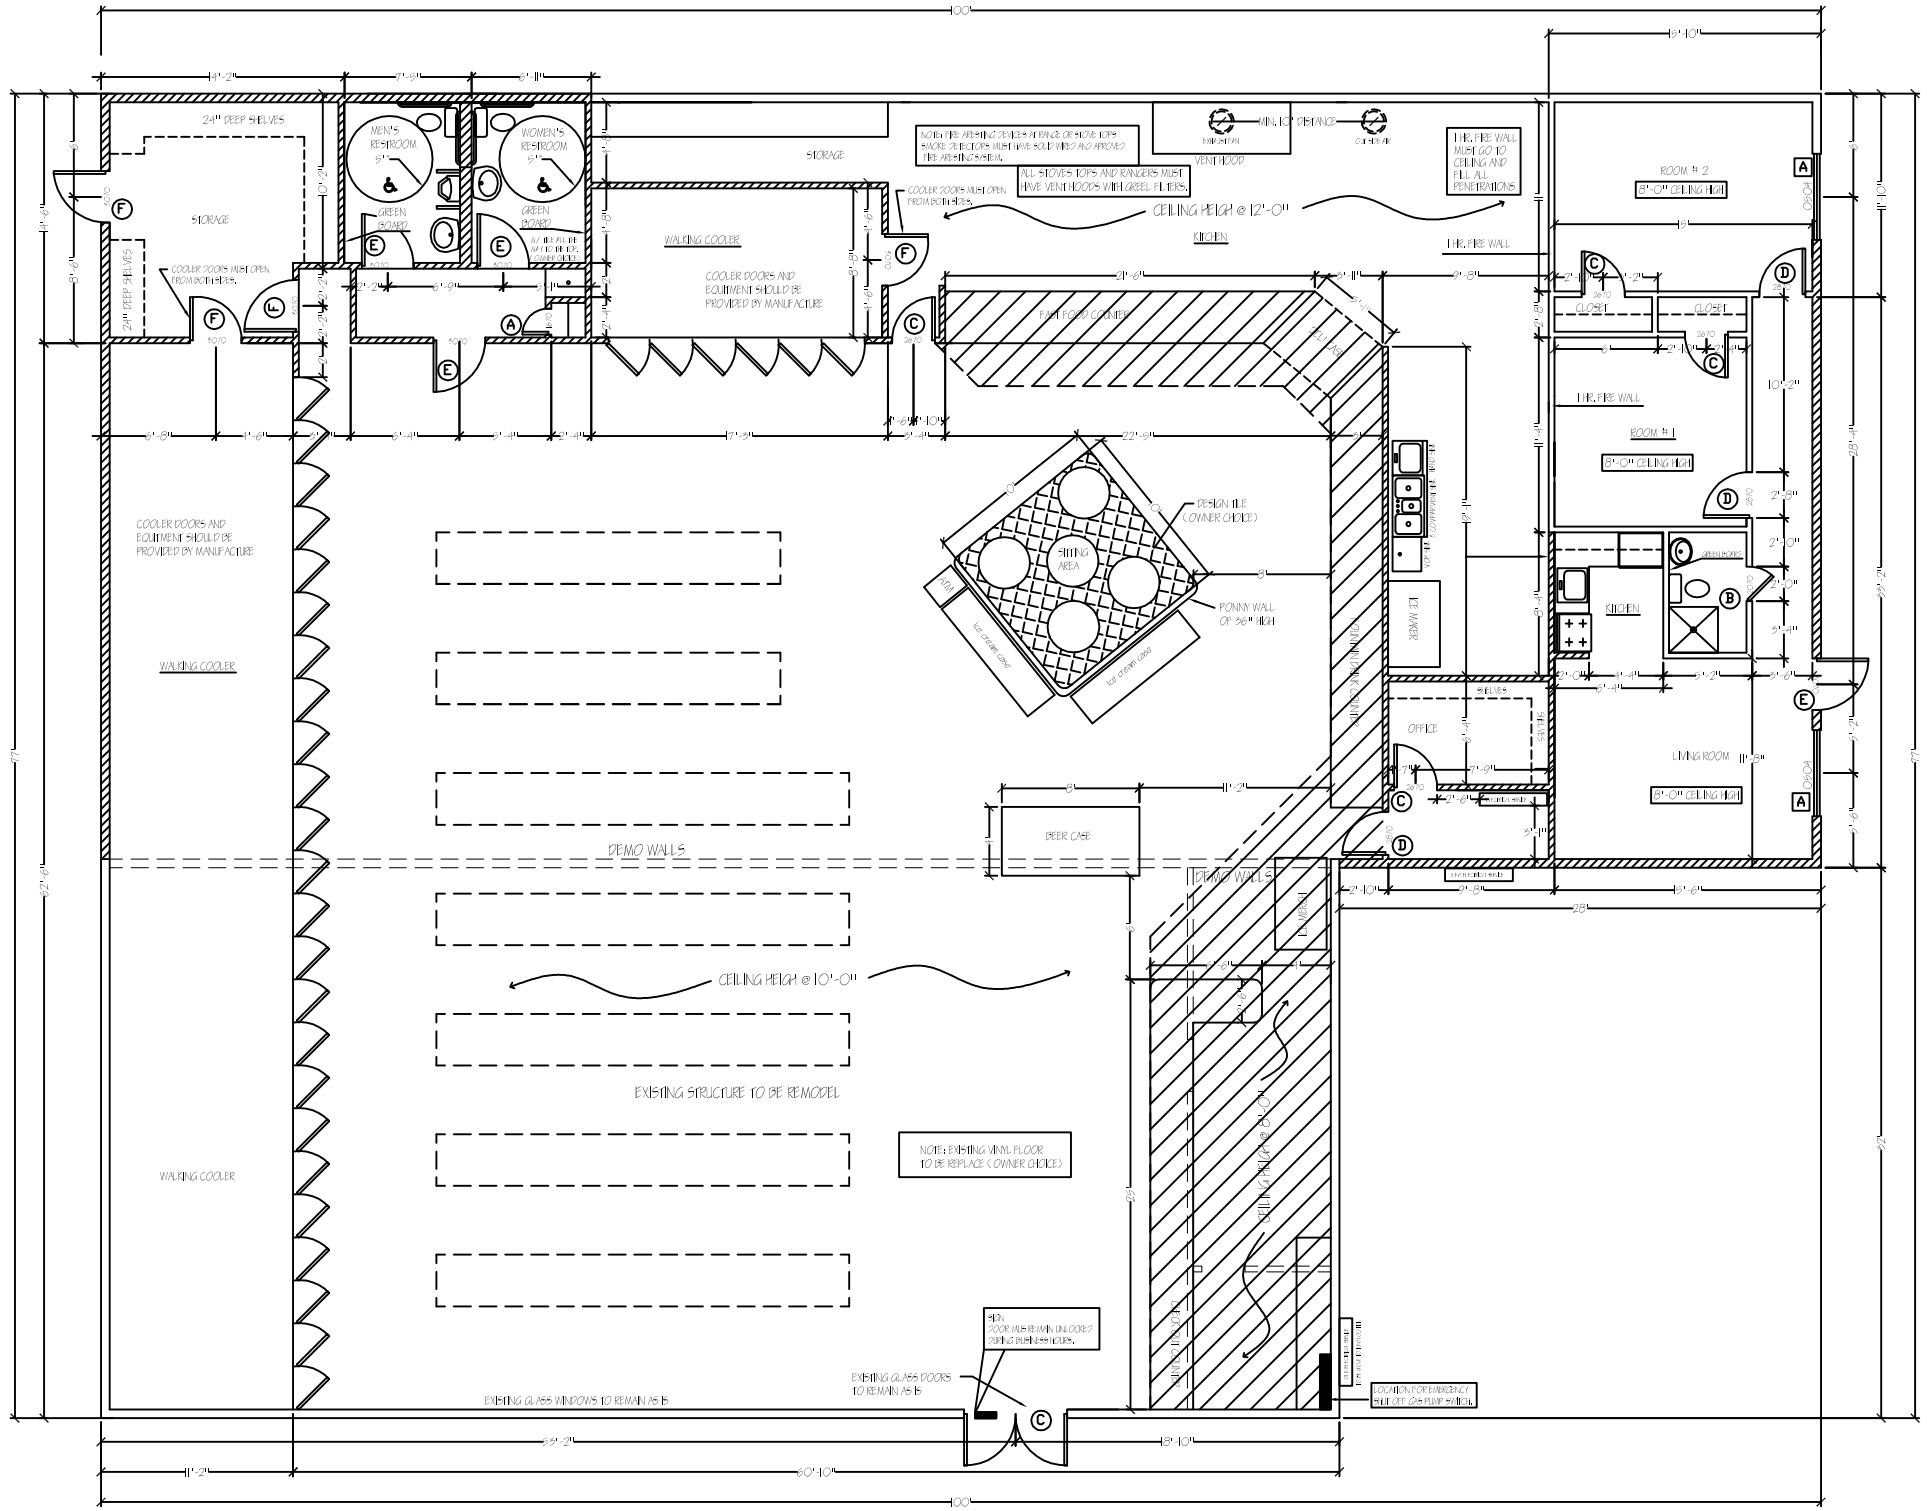

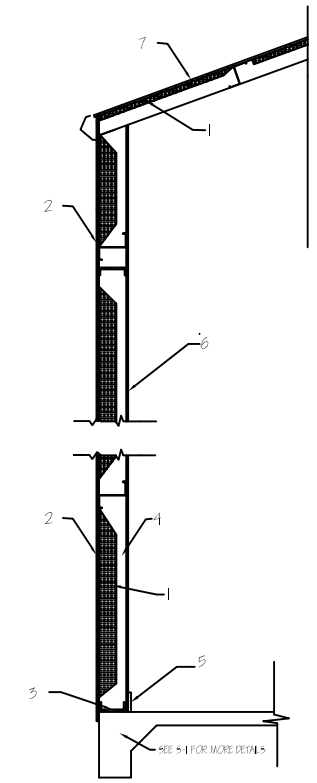

TYP. WALL SECTION
SCALE:NONE

1. ONE HOUR NONBEARING WALL ASSEMBLY UL DESIGN NO. U465
2. FLOOR AND CEILING RUNNER (NOT SHOWN) 25 GA. WITH 1" HIGH RETURN LEGS, 3-5/8" WIDE. ANCHOR TO FLOOR AND CEILING WITH FASTENERS AT 24" O.C.
3. 3-5/8" WIDE X 1-5/16 LEGS, 3*8" RETURN X 25 GA. METAL STUDS AT 16" O.C. 1-5/16" LEGS, 3/8" RETURN.
4. R-11, 3-1/2" SOUND BATT INSULATION. WHERE APPLICABLE.
5. 5/8" TYPE "X" GYPSUM BOARD WITH 1" TYPE "S" SELF-TAPPING STEEL SCREWS AT 8" O.C. ALONG EDGES OF BOARD AND 12" O.C. IN THE FIELD. JOINTS STAGGERED ON OPPOSITE SIDES OF THE ASSEMBLY.
6. JOINT TAPE AND COMPOUND - PREMIXED JOINT COMPOUND APPLIED IN TWO COATS TO JOINTS AND SCREW HEADS; PAPER TAPE, 2" WIDE, EMBEDDED IN FIRST LAYER OF COMPOUND OVER ALL JOINTS IN CEILING SPACE (FIRE TAPE). ADDITIONAL COMPOUND AND TEXTURE REQUIRED IN EXPOSED AREAS.
7. CERAMIC TILE ON GLASS MESH MORTAR UNIT IN LIEU OF GYPSUM BOARD WHERE APPLICABLE.



TYP. 1 HOUR FIRE RATED WALL
SCALE:NONE

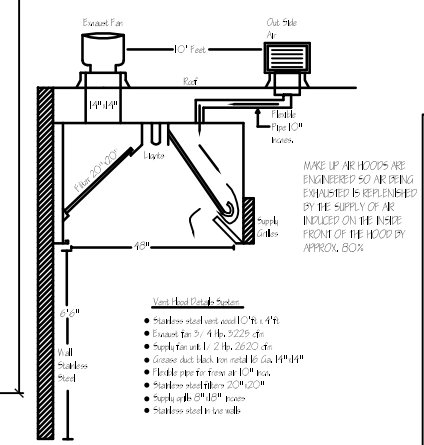

KITCHEN HOOD DETAIL

1. INSULATION
2. "R" PANEL
3. TRACK 6 - 18 GA
4. STUDS "6" - 18 GA @ 16" O.C.
5. RESILIENT BASE AS SCHEDULED
6. 5/8" GYP. WALLBOARD TYPE "X" TAPED, W/ 2 COATS JOINT COMPOUND, NO FINISH
7. METAL ROOF

EXISTING SQ.FT. = 2,304
PROPOSED NEW SQ.FT. = 4,500
TOTAL SQ.FT. = 6,804

WALL LEGEND

	EXISTING WALL
	DEMO WALL
	NEW WALLS

ROOM FINISH SCHEDULE REPAIR SHOP

ROOM NAME	FLOOR			BASE		WALLS						CEILING			NOTES
	CARPET	CERAMIC TILE	CONCRETE W/ SEALER	4" VINYL BASE	PREFINISHED METAL TRIM	5/8" GYP. BOARD W/ FRP. PANEL	PREFINISHED R- PANEL	PAINTED 5/8" GYP. BOARD.	PAINT W/ SEALER ON CMU.	CERAMIC TILE over 1/2" cement backer board	PLASTIC LAMINATE ON GYP. BD.	VINYL FACE FIBERGLASS PANEL.	2'X4' ACOUSTICAL TILE.	PAINTED EXPOSED STRUCTURE	
REPAIR AREA		o	o	o		o	o	o	o				o	o	
RESTROOMS		o		o						o			o		
STORAGE AREA			o	o		o	o	o	o				o	o	
KITCHEN		o		o				o	o				o		
OFFICE		o		o				o	o				o		
APARTMENT	o			o											

DOOR SCHEDULE REPAIR SHOP

DOOR	SIZE	FINISH	FRAME	THRESHOLD	REMARKS
A	1'-6" X 7'-0"	WOOD	WOOD		INTERIOR DOOR
B	2'-0" X 7'-0"	WOOD	WOOD		INTERIOR DOOR
C	2'-6" X 7'-0"	WOOD	WOOD		INTERIOR DOOR
D	2'-8" X 7'-0"	WOOD	WOOD		SEE NOTE # 1.
E	3'-0" X 7'-0"	WOOD	WOOD	WOOD	INTERIOR
F	3'-0" X 7'-0"	METAL DOOR	ALUMINUM	ALUMINUM	DOOR CLOSER, NOTE 1,3
G	6'-0" X 7'-0"	GLASS	ALUM		SEE NOTE # 4.

WINDOW SCHEDULE REPAIR SHOP

WINDOW	SIZE	FINISH	FRAME	SILL	REMARKS
A	5'-0" X 4'-0"	TEMP. GLASS	WOOD	WOOD	TEMP GLASS

1. PROVIDE ALL HARDWARE AND LOCKSETS
2. USE THUMB TURN LOCK INSIDE.
3. HARDWARE SHALL HAVE LEVER HANDLES MOUNTED NO MORE THAN 42" A.F.F.
4. ALL EXTERIOR DOORS SHALL HAVE THRESHOLD & WEATHER STRIPPING.
5. ALL FURNISHES AND FRONT COUNTER SHOULD BE PROVIDED BY OWNERS SPENCES

PROPOSED NEW PLAN
3/16"=1'-0"

eclipse
DESIGN AND CONSTRUCTION
PH: 832-466-4120 FAX: 281-474-9559

FLOOR PLAN FOR A COMMERCIAL BUILDING LOCATED AT
801 SOUTH MAIN
ANAHUAC TX 77514

05/28/05	DATE
M.A.	CHECK BY
M.A.	DRAWN BY
3/16"=1'-0"	SCALE
0417	PRO. NO.

SHEET: A-1